


SCREEN METAL FILTERS

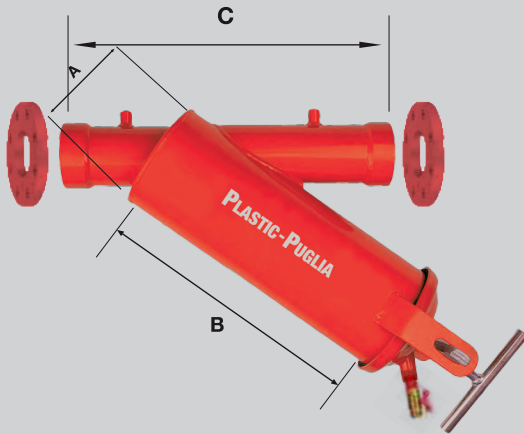

Suitable for filtering water from lakes, rivers or wells with small and medium suspended inorganic particles below 75 microns. In the presence of sand it is necessary to install a hydrocyclone filter upstream.

TECHNICAL FEATURES

- Filter body** Hot galvanized steel or epoxy-painted (on request)
- Filter element** 120/150 mesh stainless steel cartridge and polyester net
- Purge** 3/4" or 1" BSP
- Max working pressure** 6 bar - closure with bolt flange
- Accessories not included** INOX glycerin bath manometers (0÷10 bar)
3/4" or 1" purge valve

	Code	Diameter	Flow rate m ³ /h	A mm	B mm	C mm	Weight kg
THREADED	FVR2FI	2"	18	193	390	365	10
	FVR3FI	3"	36	193	450	415	16
	FVR4FI	4"	72	193	550	520	18
	FVR5FI	5"	108	193	620	605	20
	FVR6FI	6"	144	220	650	650	35
FLANGED	FVR2FL	60 mm	18	193	390	365	10
	FVR3FL	80 mm	36	193	450	415	16
	FVR4FL	100 mm	72	193	550	520	18
	FVR5FL	125 mm	108	193	620	605	20
	FVR6FL	150 mm	144	220	650	650	35

TO ORDER PAINTED VERSION, ADD LETTER "V" TO THE CODE

ACCESSORIES: n. 2 manometer and n. 1 valve € 30,00